
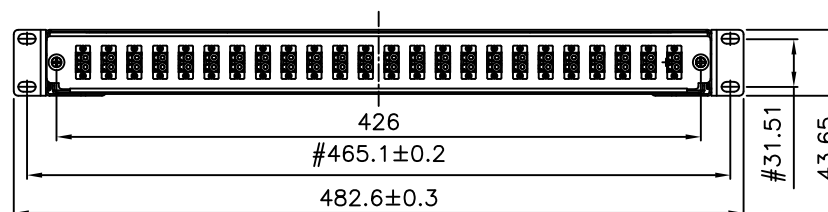
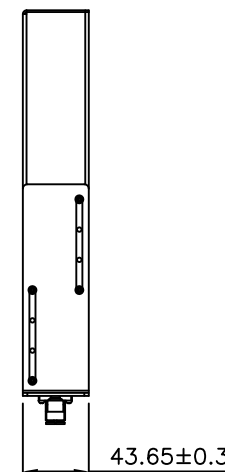
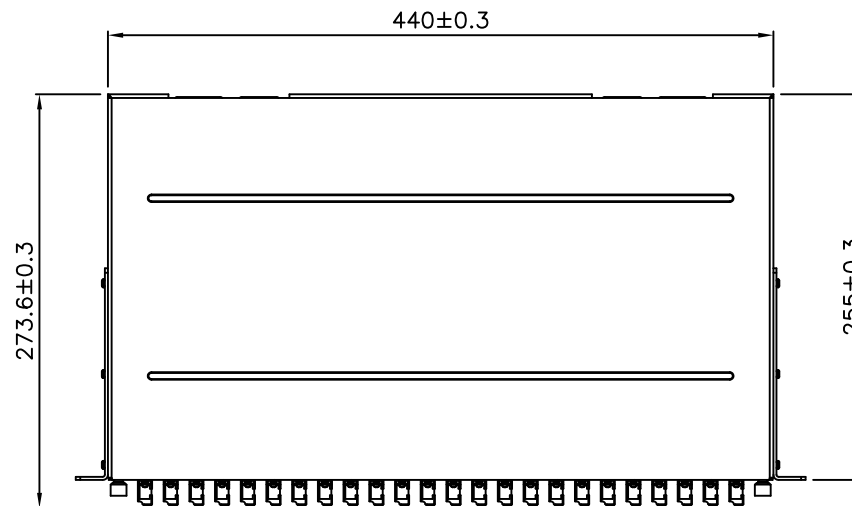
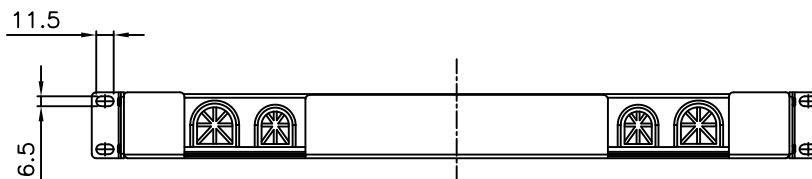


SCALE 1/10

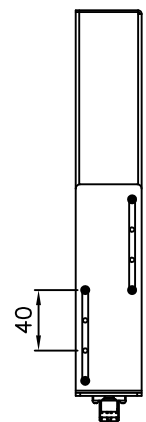

Specification :

Material :

1. Panel : Material : SPCC, 1.2mm Thickness, BK(RAL9005)
2. Adaptor
 - 2-1. Housing : Polycarbonate, UL94V-0, Aque color.
 - 2-2. Adaptor Sleeve: Zirconia sleeve.
 - 2-3. Holder : Polycarbonate, UL94V-0, Aque color.
 - 2-4. Dust Cover : PP, White Color.

Performance :

- a. Height : 1U(43.65mm) Width : 19"(482.6mm) Depth : 10"(255.0mm)
- b. Shelf Mounting Adjustment Range : 0~245.0mm
- c. Net Weight :
- d. LC to LC Duplex Type.
- e. Durability : 500 cycles.
- f. Tensile Strength : 10 kgf.
- g. Insertion Loss : <0.3 dB(Multimode).
- h. Operating Temperature : -20°C to +70°C.
- i. Storage Temperature: -40°C to +80°C.

"#": Matching DIM. "※": Important DIM. Others General DIM. GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		26.AUG.2016		LJM		AC					
	CHECK		26.AUG.2016		DAY							
	APPROVAL		26.AUG.2016		JAIMY							
			DATE		NAME		ITEM NO.: FA2037					
SCALE		1/5 (A4)		UNIT		mm		DES.: Fiber panel 24 x duplex LC multimode OM3				
				DRAWING NO.		Fiber panel 24 x duplex LC multimode OM3(S01)						
				DRAWING CLASSIFICATION		S		SHEET		1 OF 1		

1

2

0

3

4

10cm

5

6